


GM-2600D

Down-Folding Type Folder Gluer

全自動下摺式糊箱機



外型尺寸圖 | FLOOR PLAN

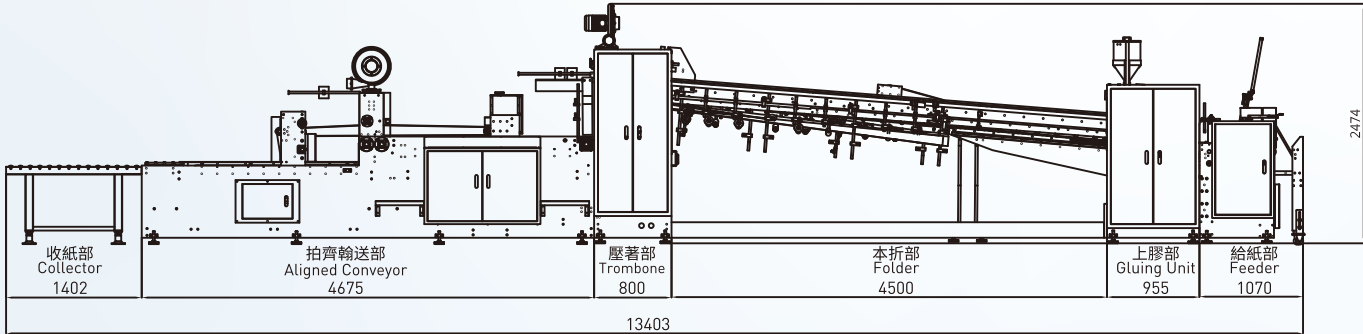

注：產品尺寸僅供參考，可能因定製而異。Dimensions are for reference only and may vary depending on customization.

設備介紹 | EQUIPMENT INTRODUCTION

下折式糊盒機主要為平口箱與邊貼箱而設計，可以大量且穩定的生產，在機器後段可銜接自動打包機，並配有智慧人機系統與數位電控調整、調機換單更加迅速，同樣數量的操作人員；生產效率更為突出。

The Down-Folding Type Folder Gluer Model GM-2200/2600D is specially designed for making RSC cartons. At a stable and high production capacity, Auto. Tying Unit can be connected in the end of the machine. With Intelligent HMI System and digital adjustment, the change-over time is fast. By the same numbers of operators, the production efficiency can be even higher comparatively.

機械特性 | MAIN FEATURES



給紙部 Feeder Section

平整出紙不歪斜，配有吸風裝置與打孔皮帶、電控左右擋板、氣壓式輔助給紙刀與輔助撐紙架。
Correct feeding without skewness by suction and hole-belts. Electrical control of left and right baffles. Built with a pneumatic auxiliary feeding knife and paper holder.



本折部 Final-Folder Section

氣壓式上壓桿，可配合勾底盒型變更長度，加上高剛性彈簧勾子座以最穩之勾底方式高速作業。
The upper carriers can be lifted up by Pneumatic. To change the length working with different designs of crash lock bottom cartons. Coupled with high steel of spring hook seat, it can work at high speed with the most stable hooking procedure.



堆疊拍齊部 Stacking and Square Unit

多角度導輪與大尺寸折帶，配置大功率馬達，生產三層與五層瓦楞紙箱使摺盒更穩定。
Multi-angle guide wheels and large-size folding belts are equipped with high-power motors to produce 3-layer and 5-layer corrugated boxes more stably.



拍齊輸送部 Square and Delivery Unit


上下皮帶坎板可單獨多向電控，採用獨立馬達控制，左右板均可單獨調速，能通過皮帶速差進一步強化糾正效果，且能夠通過速度差拉開紙盒與前端的距離，保證產品能夠平順生產不撞紙。
The upper and lower belt carriers are by independently electric controlled. With independent motor, the speed of left and right belt can be adjusted separately. Through the speed difference to have the correction on the gap of front edge of blanks to ensure smooth production without hitting paper.




操作介面 Control Panel

重型輸送機操作迅速便捷，確實給壓不彈開，電子感應自動調整輸送機速度來配合主機運轉速率。
Heavy structure of Delivery for fast adjustment to offer excellent pressure without re-opening issues. Electrical sensor control to automatically adjust the delivery speed working with the main machine.

選購配件 | OPTIONS

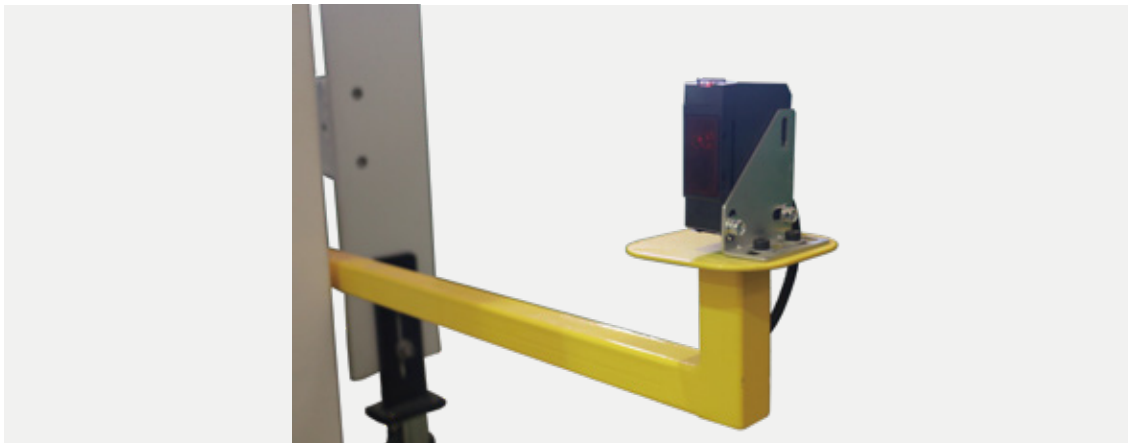

CE安全規格 CE Certificate

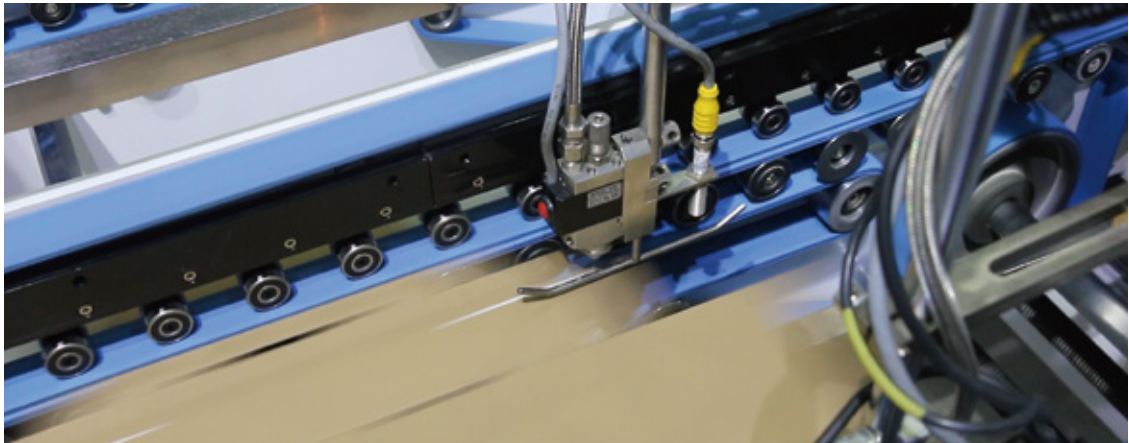

自動噴膠系統 Auto. Glue Injection System



自動捆紮機 Auto. Tying Machine

運用類型 | PACKAGING PRODUCT EXAMPLES



三層瓦楞紙箱 3-ply corrugated board




大型紙箱 Large carton

生產盒型尺寸圖 | BLANK SIZE

邊貼箱 Straight Line

邊貼箱"A"	800 至 2,600mm	Straight Line"A"	800 to 2,600mm
邊貼箱"B"	300 至 1,100mm	Straight Line"B"	300 to 1,100mm
邊貼箱"C"	最小 35mm	Straight Line"C"	Min. 35mm

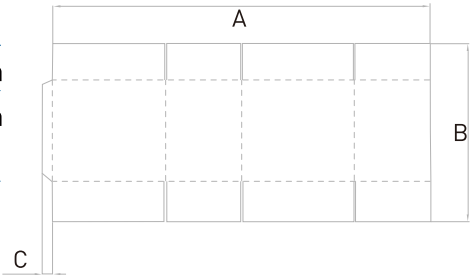

基本規格 | SPECIFICATIONS

機型	Model	GM-2600D
可使用紙類	Used Materials	紙板, 瓦楞紙(A, B, C, BC, AB) Cardboard, A, B, C, BC, AB-Flute Corrugated Board
可製作盒型	Fundamental Pattern	一般邊貼箱 Straight Line
使用接著劑	Used Glue	溶質性冷劑 White glue
最高皮帶速度	Max.Belt Speed	20-80M / min.
總功率	Total Power	25 kw
體積	Dimension	13.3M (L) x 3.7M (W)
重量	Weight	10 Tons

注:規格僅供參考, 如有變動恕不另行通知。 (The specification is subject to change for improvement without previous notice.)