


PH-A Model



	A	B	C	D	E	F	G	H	J	K	L	M	N	O
PH-A-1100	2500	1450	1100	900	2995	30	5080	900	12455	400	1530	170	500	2100
PH-A-1300	2500	1450	1100	900	2995	30	5080	900	12455	400	1730	170	500	2300
PH-A-1300L	2500	1450	1400	900	3301	30	6500	1200	14781	400	1730	170	500	2300
PH-A-1450	2500	1450	1100	900	2995	30	5080	900	12455	400	1880	170	500	2450
PH-A-1450L	2500	1450	1400	900	3301	30	6500	1200	14781	400	1880	170	500	2450
PH-A-1600	2500	1450	1100	900	2995	30	5080	900	12455	400	2030	170	500	2600
PH-A-1600L	2500	1450	1400	900	3301	30	6500	1200	14781	400	2030	170	500	2600
PH-A-1750L	2500	1450	1400	900	3301	30	6500	1200	14781	400	2180	170	500	2750
PH-A-1900L	2500	1450	1400	900	3301	30	6500	1200	14781	400	2330	170	500	2900

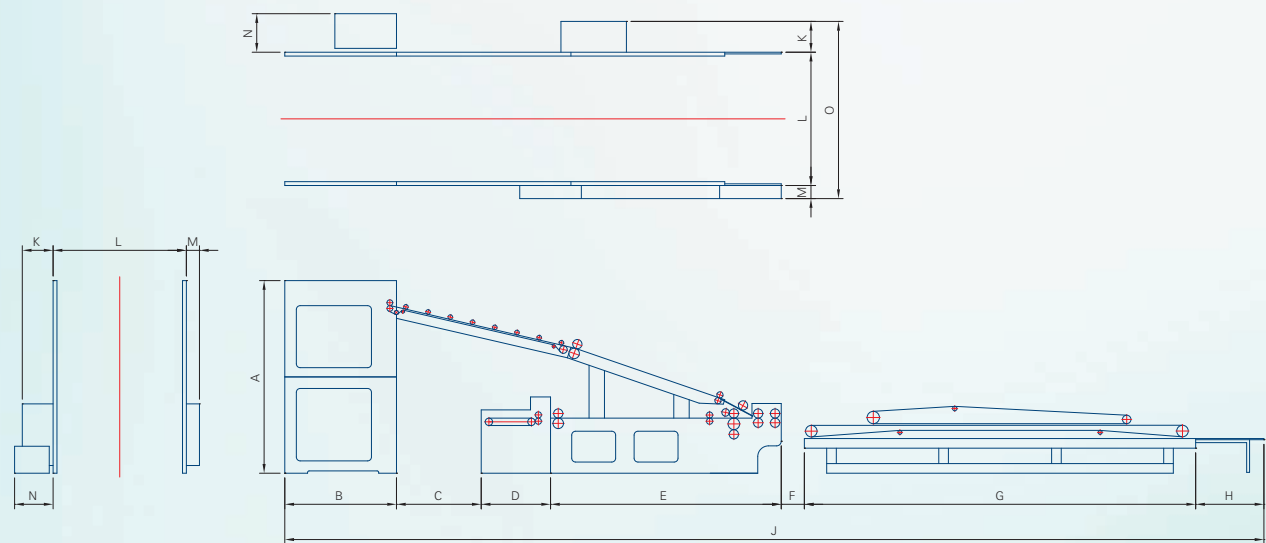

PAKTEK

PAKTEK

Professional Automatic
LAMINATOR MACHINE MANUFACTURER
專業自動貼合機製造

TAIWAN



譽邦實業有限公司
Paktek Industrial Co., Ltd.

機械規格 Specification

型號 Model	PH-A-1100	PH-A-1300	PH-A-1300L	PH-A-1450	PH-A-1450L
最大用紙尺寸 Max Sheet Size: (W×L) mm	1,100×1,150	1,300×1,150	1,300×1,450	1,450×1,150	1,450×1,450
最小用紙尺寸 Min Sheet Size: (W×L) mm	350×350	350×350	350×350	400×400	400×400
貼合誤差 Tolerance (mm)	±1.5	±1.5	±1.5	±1.5	±1.5
貼合速度(張/分) Mounting Speed (sheets/min)	0~100	0~100	0~100	0~100	0~100
機器總馬力 Power Required (HP)	17	17	17	17	17
機器總長度(米) Length of Machine (M)	12.5	12.5	15	12.5	15
機器總重量 Weight (Kg)	5,000	5,500	6,000	6,000	6,500

型號 Model	PH-A-1600	PH-A-1600L	PH-A-1750L	PH-A-1900L
最大用紙尺寸 Max Sheet Size: (W×L) mm	1,600×1,150	1,600×1,450	1,750×1,450	1,900×1,450
最小用紙尺寸 Min Sheet Size: (W×L) mm	400×400	400×400	450×450	450×450
貼合誤差 Tolerance (mm)	±1.5	±1.5	±1.5	±1.5
貼合速度(張/分) Mounting Speed (sheets/min)	0~100	0~100	0~100	0~100
機器總馬力 Power Required (HP)	17	17	17	17
機器總長度(米) Length of Machine (M)	12.7	15	15	15
機器總重量 Weight (Kg)	6,500	7,000	7,500	8,000

PAKTEK PH

註冊地址Registered address:

譽邦實業有限公司 PAKTEK INDUSTRIAL CO., LTD.
寶鴻機械有限公司 PAO HON MACHINERY CO., LTD.

241新北市三重區重新路五段609巷14號5樓之8
5F-8, No. 14, Lane 609, Sec. 5, Chung Hsin Road.,
San Chung Dist., New Taipei City 241, Taiwan
Tel: +886-2-22783208 · 85317109 Fax: +886-2-22783819
譽邦 <http://www.paktek.com.tw>
寶鴻 <http://www.paohon.url.tw>
E-mail: paktek@paktek.com.tw

BENEFIT

昆山裕邦機械有限公司 BENEFIT MACHINERY CO., LTD.

中國江蘇省昆山市張浦鎮橫澗路278號 No.278 Heng Guan Jing Road, Zhangpu, Kunshan, Jiang Su, China
Tel: +86-512-57456100 Fax: +86-512-57456108 <http://www.paktek.cn> E-mail: paktek@paktek.cn

通訊及工廠地址Postal and Factory address:

譽邦實業有限公司 PAKTEK INDUSTRIAL CO., LTD.
寶鴻機械有限公司 PAO HON MACHINERY CO., LTD.

243台灣新北市泰山區同義街171號
No.171, Tongyi St., Taishan Dist., New Taipei
City 243, Taiwan
Tel: +886-2-22783208 · 85317109 Fax: +886-2-22783819
譽邦 <http://www.paktek.com.tw>
寶鴻 <http://www.paohon.url.tw>
E-mail: paktek@paktek.com.tw

寶鴻機械有限公司為專業的自動貼合機製造商，組織成員皆累積十多年之製造經驗與技術，不斷地致力於自動貼合機的創新與研發，以提供顧客最佳品質的產品與服務。因此，在業界獲得良好的口碑及信譽。

寶鴻於2008年8月併入譽邦實業有限公司。譽邦本著創新、品質、服務、客戶滿意、一貫的經營理念，提供更寬廣的服務。選擇譽邦、信任寶鴻，將提升您的生產效能，創造更多收益。

Pao Hon Machinery Co., Ltd. is a Professional manufacturer of Automatic Laminator Machine. The team is with over 10 years of technical and professional experience on manufacturing Laminators. We continuously research、improve and develop our machines to bring our clients the best laminators and services. Therefore, Pao Hon has been enjoying a good reputation in Taiwan and Asian market.

Starting from Aug. 2008, Paktek has officially merged Pao Hon Machinery Co., Ltd. to promote the products all over the world. Paktek's policy is「innovate、quality、service、client satisfy」to supply our clients the best service widely. Choose and trust Paktek & Pao Hon, we will rise up your productivity and create efficiency availability.

此機型可適用於紙板與瓦楞紙(F、A+B浪)五層，以及紙板之貼合均可使用。


The applicable materials on Pao Hon's Laminator are (F、A+B flute) five layers of solid board to corrugated paper, and the solid board to solid board are also available.



Professional Automatic
LAMINATOR MACHINE MANUFACTURER

專業自動貼合機製造

《機器照片為CE規格》
The machine on the photo is with CE specification.

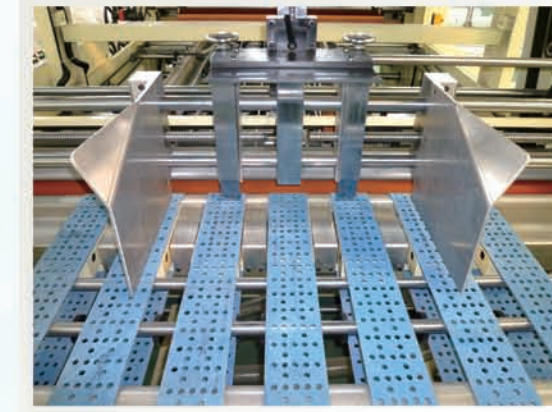

浪紙送紙採打孔皮帶配合吸氣裝置輸送，送紙平順。
The corrugated paper is delivered smoothly by suction belts with vacuum system.



給紙系統採自動循環式給糊，糊輪表面刻花處裡，可節省用糊量。
The glue filling system is by auto. recycle. The surface of gluing roller is with embossing design to save glue volume.



上推爪採相位調整方式，可在行進中進行調整，操作簡單。
Upper pushing claws can be adjusted easily in running process by phase adjuster.



使用時規皮帶傳動，傳動確實，低噪音，免保養。
The transmission is by timing belts with the advantages of accurate driving, low noise and free maintenance.



浪紙進紙膠輪可依照紙張厚薄調整間隙與壓力，非常適合3至5層浪紙之貼合。
The gap and pressure can be adjusted by rubber wheels, so it is very good to work 3-ply and 5-ply corrugated boards.